

# ASAP III

The next generation in CBRNe postal screening systems

**The ASAP III postal processing system** is a fully automated detection and identification system that can be configured to screen mail in real time for all CBRNe threat types. When used with a downdraft table in a negative pressure room, it will protect both the operator and the facility from agent contamination. All types of postal articles can be rapidly screened – letters, overnight mail, and boxes.

The biothreat component of the system can detect and identify up to eight bioagents concurrently in real time. A sensitive biofluorescence-based trigger monitors for anomalous bioaerosol events. The trigger responds within 15-30 seconds of the threat event. The bioassay is initiated by the trigger and provides a test result within 10-25 minutes total elapsed time. Light and sound alarms and a touch-panel display keep operators informed.


The system can operate in a fully automatic mode where the trigger automatically initiates a wet lateral flow bioassay protocol, or in a lower-cost semi-manual mode where the assay process is initiated manually. Results are summarized on the touch panel display and simultaneously transferred to a monitoring ASAP computer for alarm response purposes, data archiving and communication. Even though every piece of mail is subject to examination and the overall process is real-time, the cost of operation is greatly reduced and operationally less intrusive compared to periodic or batch testing since the bioassay is only initiated when a suspicious event is detected.

## FEATURES

- CBRNe & drugs of abuse supported
- Integrated bioaerosol trigger greatly lowers operating costs and speeds up mail processing
- Bioagents in 10-25 minutes total elapsed time
- No sample preparation: Up to eight simultaneous automated assays for spores, bacteria, viruses, and toxins
- 99.3% functional availability
- Targets detected in aerosol or vapor form
- Low operating costs

## APPLICATION AREAS

- Government and corporate mailrooms

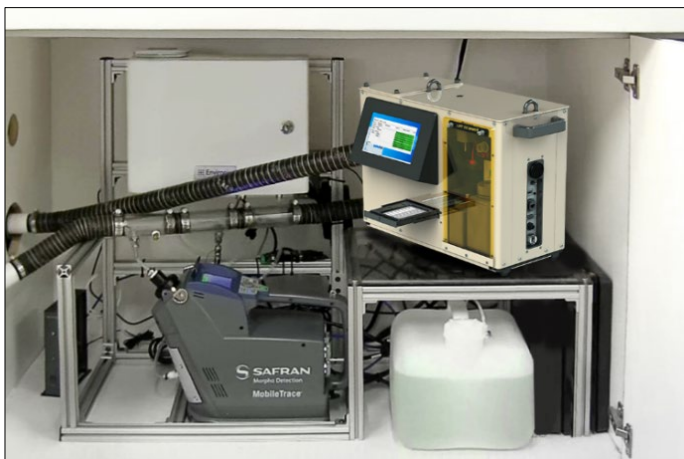

ASAP III System showing BioHawk® LF with chemical and explosives detectors.

Other optional components of the system test for chemicals, explosive particles, drugs of abuse, and radiation. These components will typically detect, identify and report in less than 20 seconds. The ASAP III system, installed in a negative pressure room equipped with a down draft table, can handle thousands of pieces of mail per hour.

An air sampling module continuously samples air drawn into the downdraft table while mail is being jogged or opened over the table's perforated top surface. Sampling and the related biological, chemical and nuclear detection and identification processes are continuous during mail handling whether it is a matter of a few minutes or several hours.

This system can be operated by general mailroom personnel, is fully automated and requires little operator assistance.

<b>Specifications for ASAP III for Postal Processing</b>	
<b>Characteristic</b>	<b>Description</b>
<b>Use profile</b>	Automated, programmed, continuous monitoring/identification of targeted toxins, viruses, bacteria, spores, industrial chemicals, explosives, drugs of abuse, and nuclear materials. Continuous or batch sample examination supported.
<b>Duty cycle</b>	Continuous. Functional availability > 99.3% <sup>(1)</sup>
<b>Air sampling rate</b>	325 LPM from downdraft table or alternate sources.
<b>Sample preparation</b>	None
<b>Bioassay profile</b>	Up to eight simultaneous assays performed using lateral flow immunoassay technology.
<b>Total bioassay time</b>	10 to 25 minutes for collection and identification combined, is typical.
<b>Toxic industrial chemicals subsystem</b>	Ion mobility spectrometry or long baseline infrared spectrometry. Gas libraries of 15 to 40 targets, depending on technology used. Analysis time less than 10 seconds.
<b>Explosives subsystem</b>	Ion trap mobility spectrometer; analysis time= 8 seconds.
<b>Nuclear materials subsystem</b>	Area and portal styles available. Typical specifications: 0.05 to 3.0 MeV gamma detection window. Detects 360 kBq of Cs-137 and 6 gm Pu(2); neutron detection optional.
<b>Bioassay sensitivity</b>	Dependent on analyte; 1-10 ppb is typical for toxins, 3 x 10 <sup>5</sup> CFU/ml typical for bacteria and spores.
<b>Fluids storage</b>	5-day supplies of buffer, disinfectant and distilled water for aerosol collector.
<b>Software interface</b>	Windows <sup>®</sup> user interface.
<b>Physical size</b>	Usually installed as an under-counter system with video monitor on counter-top.
<b>Temperature range</b>	Operating: 5°C to 40°C; instrument storage: -29°C to 66°C.
<b>System control</b>	ASAP III software controls equipment, reports alarms on screen, and communicates results. Large green/amber status light; annunciator optional.
<b>Communication</b>	RS-232 bi-directional serial link is standard.
<b>Data storage/programmability</b>	Raw/processed data storage. Operating protocols are RS-232 re-programmable.
<b>Power consumption</b>	Less than 100 W @ 115 VAC, nominal, excluding X-ray. X-ray system requires 183-253 VAC, 50 Hz. 10 A max.
<b>Humidity</b>	5% to 95%, non-condensing.
<i>Research International, Inc. reserves the right to change specifications or product source without prior notice.</i>	

**NOTES:**

(1) Functional availability is the percentage of total work time that the system is functional, averaged over a 90 calendar day period.

**Research International, Inc.****U.S. Headquarters Office**

17161 Beaton Road SE, Monroe, WA 98272-1034  
 Phone: 360-805-4930 • Fax: 360-863-0439  
 Toll Free: 1-800-927-7831  
 Email: [info@resrchintl.com](mailto:info@resrchintl.com) • Web: [www.resrchintl.com](http://www.resrchintl.com)

**U.S. East Coast Office**

Jon Tobelmann  
 Phone: 703-625-8381  
 Email: [jontobelmann@resrchintl.com](mailto:jontobelmann@resrchintl.com)

*To locate an international distributor, please contact our headquarters office.*



Visit us at [www.resrchintl.com](http://www.resrchintl.com)  
 or call 1-800-927-7831